

LUCCI Pendant
3-21-xxxx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-1550 Black/Industrial Brass



-650 White/Industrial Brass

LIGHT SOURCE	(1x) 42W LED Array, 3000K, CRI 90
LUMINAIRE POWER	42.4W Input Power
RATED LIFE	30000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: 1708 lm (LM-79)
INPUT VOLTAGE	120V AC, 50/60Hz
DRIVER OUTPUT	1000mA, 36W max power
DIMMING	TRIAC Dimming
CONSTRUCTION	Cold Rolled Steel Housing and Canopy
DIFFUSER	- Aluminum Shade
FINISHES	White/Industrial Brass (-650), Black/Industrial Brass (-1550)
MOUNTING	4" Octagonal J-Box
STANDARDS	cETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

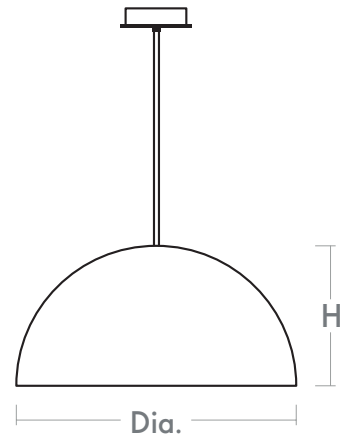

DIMENSIONS

Dia. Fixture: 23.625"
H. Fixture: 11.875"
Supplied with 10' adjustable cord to customize hanging height

Order example for standard fixture:
3-21-650 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V Only

