
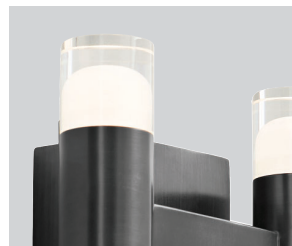


ALARUM Sconce
3-595-xx

oxygen

FIXTURE TYPE _____
PROJECT _____

LOCATION _____
DATE _____

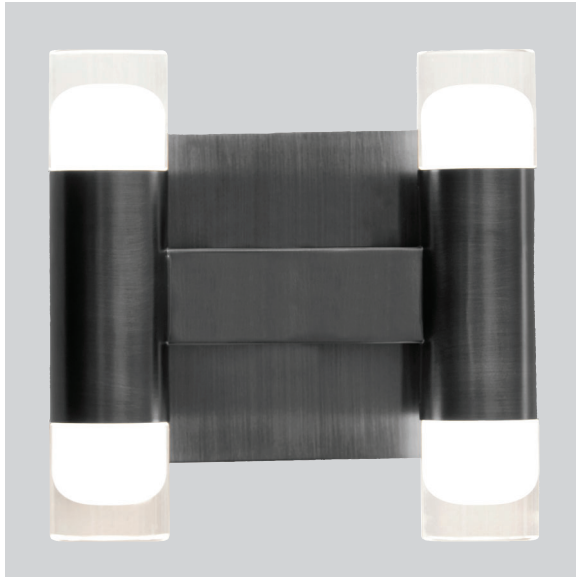


-15 Black



-24 SN

LIGHT SOURCE (4x) 3.5W LED Array , 3000K, 90 CRI (Ra)
LUMINAIRE POWER 13.7W
RATED LIFE (L70) 50000 hr RL
OPTIONAL COLOR TEMPERATURES 3000K Only
LUMEN OUTPUT 712.2 Lm (LM-79)
INPUT VOLTAGE 120V
DRIVER OUTPUT 350 mA, 17W max.
DIMMING TRIAC or ELV dimming at 120V AC Only.
 Dimmer not Included
CONSTRUCTION Painted Black Steel, Nickel plated Steel
DIFFUSER - Clear/Frost K9 crystal diffusers
FINISHES -15 Black, -24 SN
MOUNTING 4† Octagonal J-Box
STANDARDS cUL Damp Listed, ADA Compliant, Conforms to UL STD 1598, Certi-ed CAN/CSA STD C22.2 No 250.0.



DIMENSIONS

W: 8†
H: 8†
Ext: 4†
M.C: 4† From top of -xture

Order example for standard -xture:
3-595-15 (x-xxx: LED Sequence # / -xx: Finish)

