

BONGO 20" LED
3-679-xx


oxygen

FIXTURE TYPE _____
 PROJECT _____

LOCATION _____
 DATE _____



-6 White

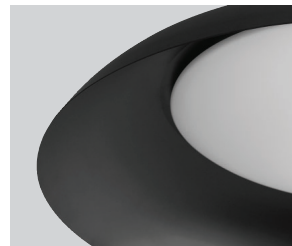


-15 Black



-40 AGB

LIGHT SOURCE (1) X 24W LED Array, Selectable color temperature CRI 90
LUMINAIRE POWER TBD Input Power
RATED LIFE 50000 hr RL
OPTIONAL COLOR TEMPERATURES Selectable (CCT) 3000/3500/4000K
LUMEN OUTPUT TBD
INPUT VOLTAGE 120V
DRIVER OUTPUT TBD
DIMMING TRIAC and ELV dimming at 120V AC
CONSTRUCTION Cold Rolled Steel Housing
DIFFUSER - Matte White Acrylic
 -06 White, -15 Black, -40 AGB,
FINISHES 4" Octagonal J-Box
MOUNTING
STANDARDS ETL Listed, Conforms to UL STD 1598,
 Certified CAN/CSA STD C22.2 No 250.0.

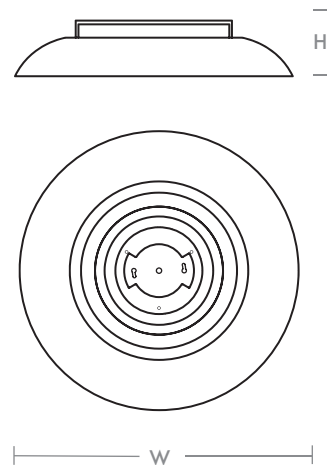

DIMENSIONS

W: 19.75
H: 4"

Order example for standard fixture:
3-596-15 (x-xxx: LED Sequence # / -xx: Finish)

