

**FAVERO Wall Sconce**  
**3-402-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_




-24 Satin Nickel



-40 Aged Brass

- LIGHT SOURCE** (2x) 3W LED Arrays, 3000K, CRI 90
- LUMINAIRE POWER** 7.3W Input Power
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 208 lm (LM-79)
- INPUT VOLTAGE** 120V to 277V AC, 50/60Hz
- DRIVER OUTPUT** 180mA, 7.6W max power
- DIMMING** TRIAC and ELV dimming at 120V AC;  
0-10V dimming, 100% to 10% current output
- CONSTRUCTION** Cold Rolled Steel Housing
- DIFFUSER** - Matte White Acrylic
- FINISHES** Satin Nickel (-24), Aged Brass (-40)
- MOUNTING** Center of fixture (8.25" from top): 2"x3" J-Box,  
4" Square J-Box with a single device mud ring  
  
Top of fixture (2.5" from top): 2"x3" J-Box, 4" Octagonal J-Box,  
4" Square J-Box, 4" Square J-Box with a single device mud ring
- STANDARDS** cUL Damp Listed, ADA Compliant, Conforms to  
UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

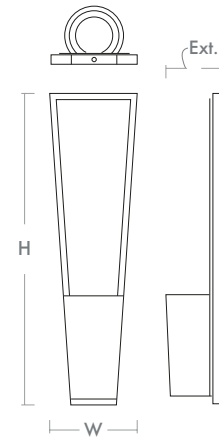

**DIMENSIONS**

- W:** 4.6875"
- H:** 16.50"
- Ext:** 3.125"
- M.C:** 8.25"/2.50" From top of fixture

Order example for standard fixture:

**3-402-40** (x-xxx: LED Sequence # / -xx: Finish)

Order example for optional color temperatures: **3-402-2740**

**27:** 2700K, **35:** 3500K, **40:** 4000K

