

**LANDON Pendant**  
**3-421-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_


PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-15 Black

<b>LIGHT SOURCE</b>	(1x) 17W LED Array, 3000K, 90 CRI (Ra)
<b>LUMINAIRE POWER</b>	16.11W
<b>RATED LIFE (L70)</b>	50000 hrs RL
<b>COLOR TEMPERATURES</b>	Field Selectable 3000K/3500K/4000K Note: Oxygen Standard setting is 3000K
<b>LUMEN OUTPUT</b>	849.1 Lm (LM-79)
<b>INPUT VOLTAGE</b>	120V
<b>DRIVER OUTPUT</b>	580 mA, 28W max.
<b>DIMMING</b>	TRIAC and ELV dimming at 120V AC
<b>CONSTRUCTION</b>	Cold Rolled Steel Housing and Canopy
<b>DIFFUSER</b>	- Iced Acrylic Diffuser
<b>FINISHES</b>	-15 Black, -40 AGB
<b>MOUNTING</b>	4" Octagonal J-Box
<b>STANDARDS</b>	cUL Damp Listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

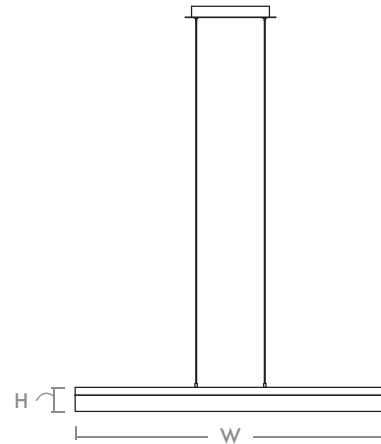

**DIMENSIONS**

**Canopy:** 11.375" L x 5.75" W x 1.375" Ht  
**Fixture:** 40" L x 3.5" W x 1" Ht  
**OAH:** Provided with 10' adjustable cable

Order example for standard fixture:  
**3-421-15** (x-xxx: LED Sequence # / -xx: Finish)

