

**ADELPHI Vanity**  
**3-537-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_


DATE \_\_\_\_\_



-24 Satin Nickel



-15 Black




-22 Oiled Bronze



-40 Aged Brass

- LIGHT SOURCE** 1 x 11.7W LED, 3000K, CRI 90
- LUMINAIRE POWER** 14.1W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 1258 lm (LM-79)
- INPUT VOLTAGE** 120V to 277V AC, 50/60Hz
- DRIVER OUTPUT** 350mA, 14.7W max power
- DIMMING** TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 10% current output
- CONSTRUCTION** Plated Steel and Acrylic
- DIFFUSER** - Matte White Acrylic
- FINISHES** Black (-15), Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
- MOUNTING** 4" Octagonal J-Box, 4" Square J-Box, 4" Square J-Box with single device mud ring, 4" Square J-Box with round mud ring (2.75" center to center mounting)
- STANDARDS** UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.  
\*California T24 JA8-2019 Compliant At 0-10v Only.

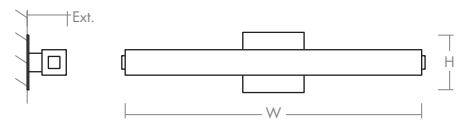

**DIMENSIONS**

- W:** 24.25"
- H:** 4.75"
- Ext:** 3.50"
- M.C:** 2.37" From top of fixture

Order example for standard fixture:  
**3-537-24** (x- Voltage - xxx-Sequence # - xx-Finish)  
Order example for optional color temperatures: **3-537-2724**  
**27:** 2700K, **35:** 3500K, **40:** 4000K

