

**SABRE Pendant**  
**3-6004-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_  
PROJECT \_\_\_\_\_

LOCATION \_\_\_\_\_  
DATE \_\_\_\_\_



-15 Black



-15 Black




-40 AGB

<b>LIGHT SOURCE</b>	(1x) 6W LED Array, 3000K, 90 CRI (Ra)
<b>LUMINAIRE POWER</b>	6.53 W
<b>RATED LIFE (L70)</b>	50000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	Field Selectable 3000K/3500K/4000K Note: Oxygen Standard setting is 3000K
<b>LUMEN OUTPUT</b>	284.2 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V
<b>DRIVER OUTPUT</b>	160 mA, 7W max.
<b>DIMMING</b>	TRIAC and ELV dimming at 120V AC
<b>CONSTRUCTION</b>	Painted Black Steel, Plated Steel
<b>DIFFUSER</b>	- Matte White Acrylic
<b>FINISHES</b>	-15 Black, -40 AGB
<b>MOUNTING</b>	4† Octagonal J-Box
<b>STANDARD</b>	cETLus Damp Listed, ADA Compliant, Conforms to UL STD 1598, Certi-ed CAN/CSA STD C22.2 No 250.0.

**DIMENSIONS**

**Canopy Dia.:** 5.5†  
**Fixture Dia.:** 1.5†  
**Fixture Ht:** 16†  
**OAH:** Provided with 10" Adjustable Cable to Customize hanging Height

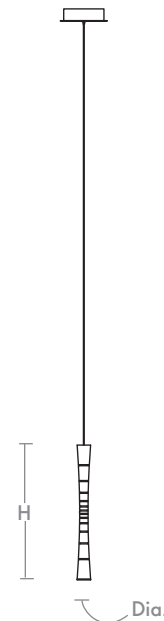

Order example for standard -xture:  
**3-6004-15** (x-xxx: LED Sequence # / -xx: Finish)

