

**BRIO Pendant**  
**3-6017-xx**



oxygen

FIXTURE TYPE \_\_\_\_\_


LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_

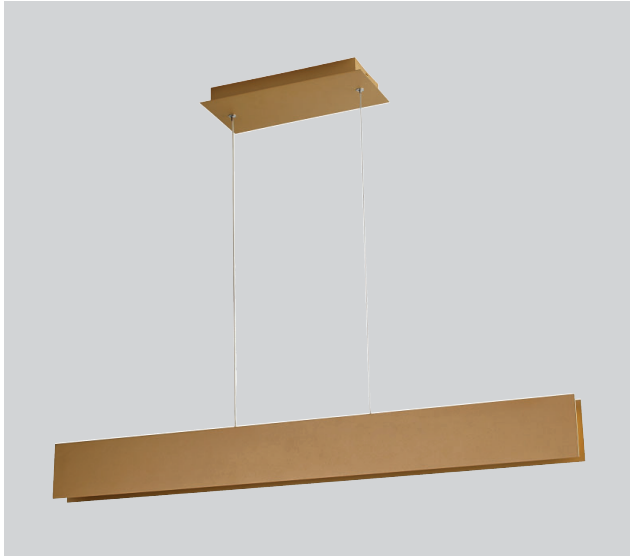


-15 Black



-60 PGL

<b>LIGHT SOURCE</b>	(1x) 73W LED Array, BI-DIRECTIONAL (Up and Down Light) 3000K, 90 (Ra)
<b>LUMINAIRE POWER</b>	68022W
<b>RATED LIFE (L70)</b>	50000 hr RL
<b>COLOR TEMPERATURE</b>	3000K
<b>LUMEN OUTPUT</b>	1003 Lm (LM-79)
<b>INPUT VOLTAGE</b>	120V
<b>DRIVER OUTPUT</b>	1000mA, 45W Max
<b>DIMMING</b>	TRIAC and ELV dimming at 120V AC
<b>CONSTRUCTION</b>	Powder Coated Cold Rolled Steel
<b>DIFFUSER</b>	- Matte White Acrylic
<b>FINISHES</b>	-15 Black, -60 PLG
<b>MOUNTING</b>	4" Octagonal J-Box
<b>STANDARDS</b>	cUL Damp Listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

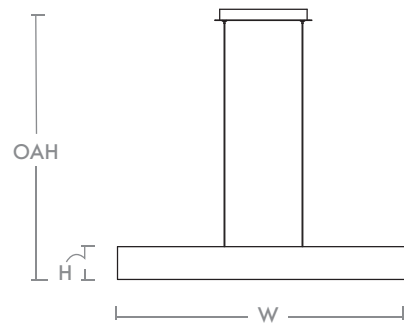

**DIMENSIONS**

<b>Canopy:</b>	<b>14" L x 5.9" W x 1.375" Ht</b>
<b>W:</b>	<b>36"</b>
<b>H:</b>	<b>4.25"</b>
<b>OAH:</b>	<b>Provided with 10' adjustable cable</b>

Order example for standard fixture:  
**3-6017-15** (x-xxx: LED Sequence # / -xx: Finish)

