

ALARUM 20 LT Chandelier
3-6095-15



oxygen

FIXTURE TYPE _____

LOCATION _____


PROJECT _____

DATE _____

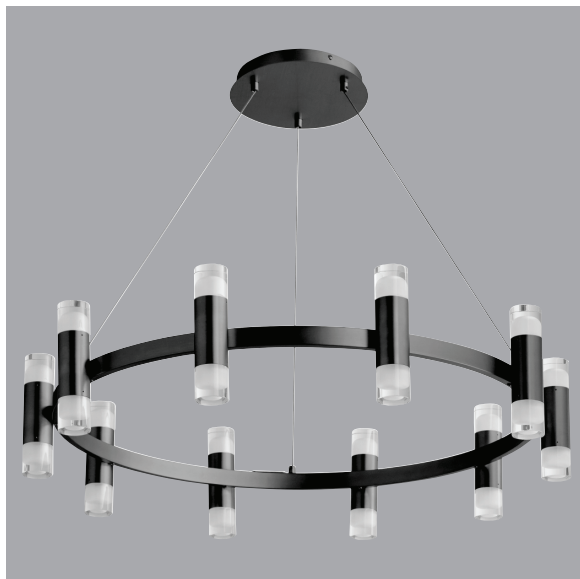

-15 Black

LIGHT SOURCE	(20x) 2.9W LED Array, Selectable Color Temp CRI 90
LUMINAIRE POWER	TBD Input Power
RATED LIFE	50000 hr RL
OPTIONAL COLOR TEMPERATURES	Selectable (CCT) 3000K/3500K/4000K
LUMEN OUTPUT	TBD
INPUT VOLTAGE	120-277V
DRIVER OUTPUT	TBD
DIMMING	TRIAC and ELV dimming at 120V AC
CONSTRUCTION	Cold Rolled Steel Housing
DIFFUSER	-Clear/Frost K9 crystal diffusers
FINISHES	-15 Black
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Damp Listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

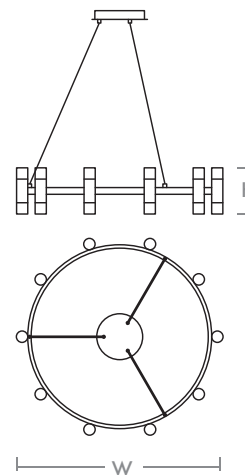

DIMENSIONS

W: 40"
H: 3.5"

Order example for standard fixture:
3-6095-15 (x-xxx: LED Sequence # / -xx: Finish)
 Order example for optional color temperatures: **3-421-**
27: 2700K, **35:** 3500K, **40:** 4000K

