

CIRCULO Two Tier Pendant
3-6548-15

oxygen

FIXTURE TYPE _____

LOCATION _____


PROJECT _____

DATE _____



-15 Black

LIGHT SOURCE	LED Array, 3000K, CRI 90
LUMINAIRE POWER	63W (bottom ring) +95W (Top Ring) at 120V
RATED LIFE	50000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Initial: 18000 lm
INPUT VOLTAGE	120V AC, 50/60Hz
DRIVER OUTPUT	3 x 1200 mA Max, 3 x 55W
DIMMING	TRIAC Dimming
CONSTRUCTION	Aluminum Housing and Steel Canopy
DIFFUSER	- Matte White Acrylic
FINISHES	-Black (-15),
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Dry listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

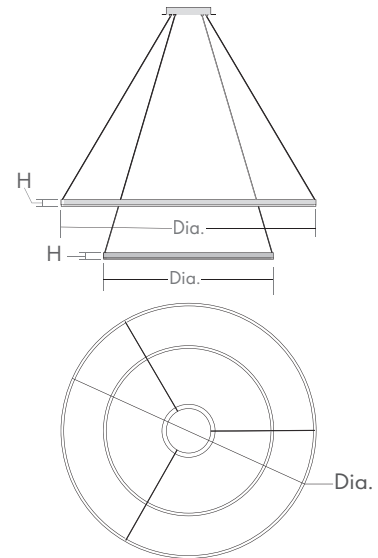

DIMENSIONS

Dia. Fixture: 47.25"
Dia. Lower ring 31.5"
Ring H. (both) 1.25"
 *Hanging height adjustable with 10ft. cables

