

**REFLEX Outdoor**  
**3-751-15**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_


PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-15 Black

<b>LIGHT SOURCE</b>	(2x) 6W LED Array, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	18W
<b>RATED LIFE</b>	50000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	Field Selectable 3000K/3500K/4000K Note: Oxygen Standard setting is 3000K
<b>LUMEN OUTPUT</b>	903Lm (LM-79)
<b>INPUT VOLTAGE</b>	120-277V
<b>DRIVER OUTPUT</b>	TBD
<b>DIMMING</b>	Triac dimming 10-100%
<b>CONSTRUCTION</b>	Constructed of Coastal Grade Material
<b>DIFFUSER</b>	Perforated Metal Diffuser.
<b>FINISHES</b>	15 Black
<b>MOUNTING</b>	Installs on 4" octagonal junction box
<b>STANDARDS</b>	cUL Damp Listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

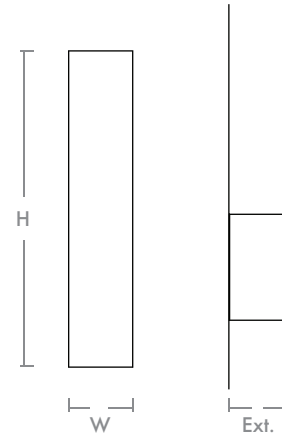

**DIMENSIONS**

<b>W:</b>	<b>4.75"</b>
<b>H:</b>	<b>20"</b>
<b>Ext:</b>	<b>3.625"</b>
<b>M.C:</b>	<b>13.3" From top of fixture</b>

Note:

