

**VIVO 1LT LED Pendant**  
**3-809-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_




-15 Black



-40 AGB

- LIGHT SOURCE** (1) X 8W LED Array, Selectable Color Temp., CRI 90
- LUMINAIRE POWER** XXXXXX Input Power
- RATED LIFE** 50000 hr RL
- OPTIONAL COLOR TEMPERATURES** Selectable (CCT) 3000/3500/4000K
- LUMEN OUTPUT** TBD
- INPUT VOLTAGE** 120V
- DRIVER OUTPUT** TBD
- DIMMING** TRIAC and ELV dimming at 120V AC
- CONSTRUCTION** Cold Rolled Steel Housing
- DIFFUSER** - Clear with White Faceted Glass
- FINISHES** -15 Black, -40 AGB
- MOUNTING** 4" Octagonal J-Box
- STANDARDS** ETL Listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

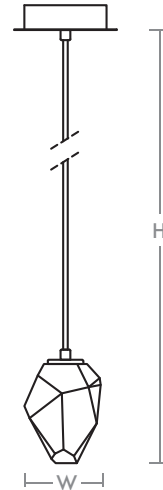

**DIMENSIONS**

- W:** 4.75"
- H:**
- Ext:**
- M.C:** X" From top of fixture

Note:

Order example for standard fixture:  
**3-809-15** (x-xxx: LED Sequence # / -xx: Finish)

