

**LUNA Pendant**  
**3-670-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_




-22 Oiled Bronze

-20 Polished Nickel

-24 Satin Nickel

-40 Aged Brass

- LIGHT SOURCE** 1 x 5.1W LED, 3000K, CRI 90
- LUMINAIRE POWER** 7.2W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 368 lm (LM-79)
- INPUT VOLTAGE** 120V to 277V AC, 50/60Hz
- DRIVER OUTPUT** 180mA, 7.6W max power
- DIMMING** TRIAC and ELV dimming at 120V AC;  
0-10V dimming, 100% to 1% current output
- CONSTRUCTION** Plated Steel and Glass
- DIFFUSER** - White Opal Glass
- FINISHES** Polished Nickel (-20), Oiled Bronze (-22),  
Satin Nickel (-24), Aged Brass (-40)
- MOUNTING** 4" Octagonal J-Box \*,  
4" Square J-Box \* with a single device mud ring  
\* Deep J-Box (Required to house driver)
- STANDARDS** UL Dry/Damp listed, Conforms to UL STD 1598,  
Certified CAN/CSA STD C22.2 No 250.0.

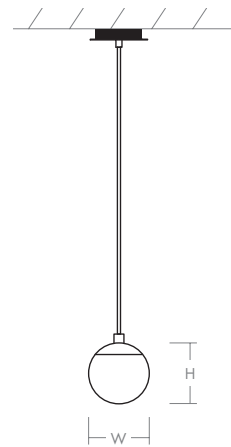

**DIMENSIONS**

**Dia. Canopy: 5.88"**

**W. Fixture: 6.00"**

**H. Fixture: 8.25"**

**Supplied with 10 ft braided cord**

Order example for standard fixture:

**3-670-24** (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-670-2724**

27: 2700K, 35: 3500K, 40: 4000K

